Sparse & Redundant Representation Modeling of Images: Theory and Applications



Michael Elad


The Computer Science Department

The Technion

Haifa 32000, Israel

This Talk Gives and Overview On ...

A decade of tremendous progress in the field of

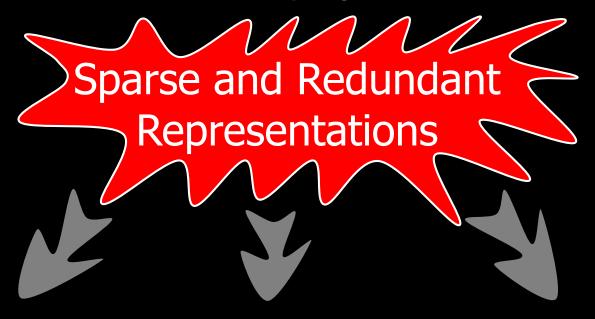


Theory

Numerical Problems

Applications

Agenda

Part I – Denoising by Sparse & Redundant Representations



Part II – Theoretical & Numerical Foundations

Part III – Dictionary Learning& The K-SVD Algorithm



Part V — Summary & Conclusions



Part IV — Back to Denoising ... and Beyond —
 handling stills and video denoising & inpainting,
 demosaicing, super-res., and compression

Today we will show that

- ☐ Sparsity and Redundancy are valuable and well-founded tools for modeling data.
- ☐ When used in image processing, they lead to state-of-the-art results.

Part I Denoising by Sparse & Redundant Representations

Noise Removal?

Our story begins with image denoising ...



- ☐ Important: (i) Practical application; (ii) A convenient platform (being the simplest inverse problem) for testing basic ideas in image processing, and then generalizing to more complex problems.
- Many Considered Directions: Partial differential equations, Statistical estimators, Adaptive filters, Inverse problems & regularization, Wavelets, Example-based techniques, Sparse representations, ...

Denoising By Energy Minimization

Many of the proposed image denoising algorithms are related to the minimization of an energy function of the form

$$f(\underline{x}) = \frac{1}{2} \|\underline{x} - \underline{y}\|_{2}^{2} + G(\underline{y})$$

y: Given measurements

x : Unknown to be recovered

Relation to measurements

Prior or regularization

- ☐ This is in-fact a Bayesian point of view, adopting the Maximum-A-posteriori Probability (MAP) estimation.
- Clearly, the wisdom in such an approach is within the choice of the prior modeling the images of interest.



Thomas Bayes 1702 - 1761

The Evolution of G(x)

During the past several decades we have made all sort of guesses about the prior $G(\underline{x})$ for images:

$$\mathsf{G}\big(\underline{\mathsf{x}}\big) = \lambda \left\|\underline{\mathsf{x}}\right\|_2^2$$

$$G(\underline{\mathbf{x}}) = \lambda \|\mathbf{L}\underline{\mathbf{x}}\|_{2}^{2}$$

$$\mathsf{G}ig(\underline{\mathsf{x}}ig) = \lambda \left\| \mathsf{L}\underline{\mathsf{x}} \right\|_{\mathsf{w}}^2$$















$$G(\underline{x}) = \lambda \|\nabla \underline{x}\|_{1} \quad G(\underline{x}) = \lambda \|\mathbf{W}\underline{x}\|_{1}$$


















Sparse Modeling of Signals

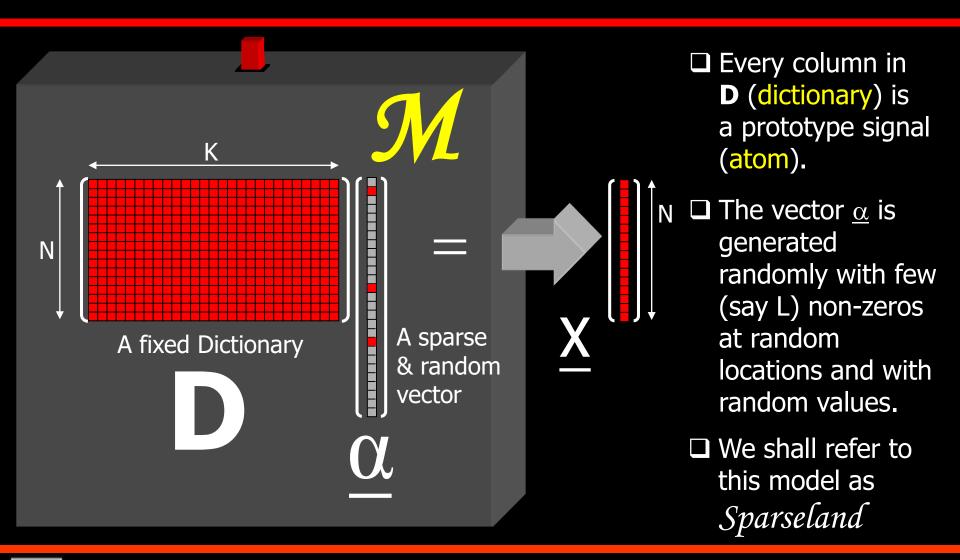


Sparseland Signals are Special

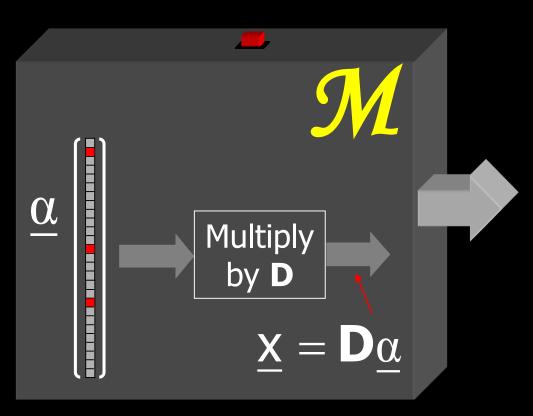

Interesting Model:

- □ **Simple:** Every generated signal is built as a linear combination of **few** atoms from our dictionary **D**
- □ Rich: A general model: the obtained signals are a union of many low-dimensional Gaussians.
- □ Familiar: We have been using this model in other context for a while now (wavelet, JPEG, ...).

Sparse & Redundant Rep. Modeling?

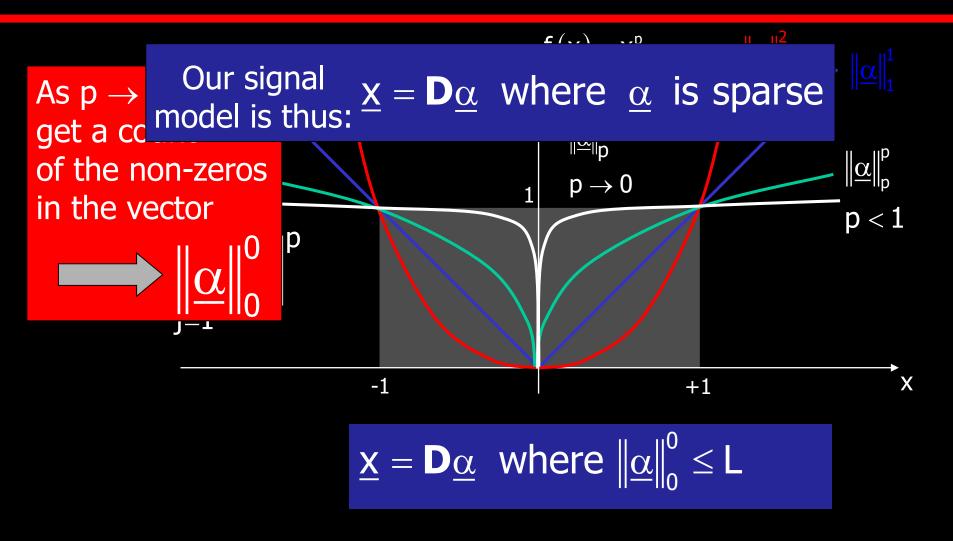

Back to Our MAP Energy Function

- □ We L_0 norm is effectively counting the number of non-zeros in $\underline{\alpha}$.
- The vector $\underline{\alpha}$ is the representation (**sparse/redundant**) of the desired signal x.

□ The core idea: while few (L out of K) atoms can be merged to form the true signal, the noise cannot be fitted well. Thus, we obtain an effective projection of the noise onto a very low-dimensional space, thus getting denoising effect.

Wait! There are Some Issues

■ Numerical Problems: How should we solve or approximate the solution of the problem

$$\min_{\underline{\alpha}} \|\mathbf{D}\underline{\alpha} - \underline{y}\|_2^2 \text{ s.t. } \|\underline{\alpha}\|_0^0 \le L$$


$$\min_{\underline{\alpha}} \left\| \mathbf{D}\underline{\alpha} - \underline{y} \right\|_2^2 \text{ s.t. } \left\| \underline{\alpha} \right\|_0^0 \leq L \text{ or } \min_{\underline{\alpha}} \left\| \underline{\alpha} \right\|_0^0 \text{ s.t. } \left\| \mathbf{D}\underline{\alpha} - \underline{y} \right\|_2^2 \leq \epsilon^2$$

or
$$\min_{\underline{\alpha}} \lambda \|\underline{\alpha}\|_0^0 + \|\mathbf{D}\underline{\alpha} - \underline{y}\|_2^2$$
 ?

- ☐ Theoretical Problems: Is there a unique sparse representation? If we are to approximate the solution somehow, how close will we get?
- ☐ Practical Problems: What dictionary **D** should we use, such that all this leads to effective denoising? Will all this work in applications?

To Summarize So Far ...

Image denoising
(and many other
problems in image
processing) requires
a model for the
desired image



We proposed a model for signals/images based on sparse and redundant representations

There are some issues:

- 1. Theoretical
- 2. How to approximate?
- 3. What about **D**?

Part II Theoretical & Numerical Foundations

Lets Start with the Noiseless Problem

Suppose we build a signal by the relation

$$\mathbf{D}\underline{\alpha} = \underline{\mathbf{X}}$$

We aim to find the signal's representation:

sentation:
$$\underline{\hat{\alpha}} = \text{ArgMin} \|\underline{\alpha}\|_0^0 \quad \text{s.t.} \quad \underline{\mathbf{x}} = \mathbf{D}\underline{\alpha}$$



Why should we necessarily get $\hat{\alpha} = \alpha$?

It might happen that eventually $\|\hat{\underline{\alpha}}\|_0^0 < \|\underline{\alpha}\|_0^0$.

$$\|\underline{\hat{\alpha}}\|_0^0 < \|\underline{\alpha}\|_0^0$$

Known

Matrix "Spark"

Definition: Given a matrix \mathbf{D} , $\sigma = \operatorname{Spark}\{\mathbf{D}\}$ is the smallest number of columns that are linearly dependent.

Donoho & E. ('02)

Example:

Rank = 4

Spark = 3

* In tensor decomposition, Kruskal defined something similar already in 1989.

Uniqueness Rule

Suppose this problem has been solved somehow

$$\underline{\hat{\alpha}} = \operatorname{ArgMin}_{\underline{\alpha}} \|\underline{\alpha}\|_{0}^{0} \text{ s.t. } \underline{\mathbf{x}} = \mathbf{D}\underline{\alpha}$$

Uniqueness

Donoho & E. ('02)


If we found a representation that satisfy

$$\left\| \hat{\underline{\alpha}} \right\|_0 < \frac{\sigma}{2}$$

Then necessarily it is unique (the sparsest).

This result implies that if \mathcal{M} generates signals using "sparse enough" $\underline{\alpha}$, the solution of the above will find it exactly.

Our Goal

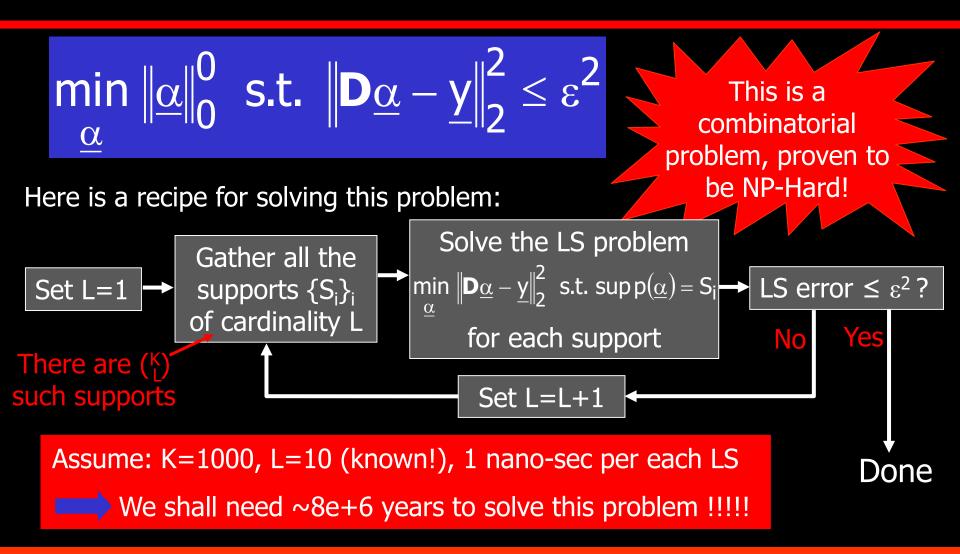

Lets Approximate





Smooth the L₀ and use continuous optimization techniques



Greedy methods

Build the solution one non-zero element at a time

Relaxation – The Basis Pursuit (BP)

Instead of solving

$$\underset{\underline{\alpha}}{\text{Min}} \ \|\underline{\alpha}\|_{0}^{0} \quad \text{s.t.} \quad \|\mathbf{D}\underline{\alpha} - \underline{y}\|_{2} \leq \varepsilon$$




Solve Instead

$$\underset{\underline{\alpha}}{\text{Min}} \ \|\underline{\alpha}\|_{1} \quad \text{s.t.} \quad \|\underline{\mathbf{D}}\underline{\alpha} - \underline{\mathbf{y}}\|_{2} \leq \varepsilon$$


- ☐ This is known as the Basis-Pursuit (BP) [Chen, Donoho & Saunders ('95)].
- ☐ The newly defined problem is convex (quad. programming).
- ☐ Very efficient solvers can be deployed:
 - Interior point methods [Chen, Donoho, & Saunders ('95)] [Kim, Koh, Lustig, Boyd, & D. Gorinevsky ('07)].
 - Sequential shrinkage for union of ortho-bases [Bruce et.al. ('98)].
 - Iterative shrinkage [Figuerido & Nowak ('03)] [Daubechies, Defrise, & De-Mole ('04)]
 [E. ('05)] [E., Matalon, & Zibulevsky ('06)] [Beck & Teboulle (`09)] ...

Go Greedy: Matching Pursuit (MP)

- ☐ The MP is one of the greedy algorithms that finds one atom at a time [Mallat & Zhang ('93)].
- □ Step 1: find the one atom that best matches the signal.
- □ Next steps: given the previously found atoms, find the next <u>one</u> to best fit the rsidual.



☐ The Orthogonal MP (OMP) is an improved version that re-evaluates the coefficients by Least-Squares after each round.

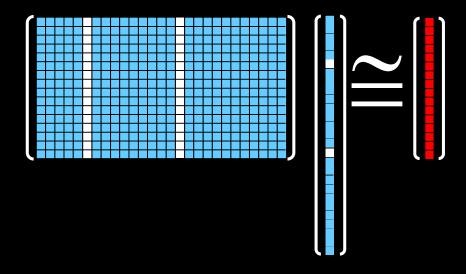

Pursuit Algorithms

$$\min_{\underline{\alpha}} \|\underline{\alpha}\|_0^0 \quad \text{s.t.} \quad \|\mathbf{D}\underline{\alpha} - \underline{y}\|_2^2 \le \epsilon^2$$

There are various algorithms designed for approximating the

solution of

- ☐ Greedy A (OMP), L Pursuit [:
- □ Relaxatio & numer
- ☐ Hybrid Al


Thresholaing [2007-today].





The Mutual Coherence

□ Compute

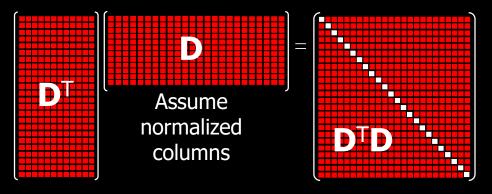

- \Box The Mutual Coherence μ is the largest off-diagonal entry in absolute value.
- ☐ The Mutual Coherence is a property of the dictionary (just like the "Spark"). In fact, the following relation can be shown:

 1

 $\sigma \geq 1 + \frac{1}{\mu}$

BP and MP Equivalence (No Noise)

Equivalence

Donoho & E. ('02)
Gribonval & Nielsen ('03)

Tropp ('03) Temlyakov ('03)

Given a signal \underline{x} with a representation $\underline{x} = \mathbf{D}\underline{\alpha}$, assuming that $\|\underline{\alpha}\|_0^0 < 0.5 (1+1/\mu)$, BP and MP are guaranteed to find the sparsest solution.

- $\hat{Q} = \underset{\text{offerent in general (n)}}{\text{MP and BP are different in general (n)}} St x = DQ$
- ☐ The above result corresponds to the worst-case, and as such, it is too pessimistic.
- □ Average performance results are available too, showing much better bounds [Donoho (`04)] [Candes et.al. ('04)] [Tanner et.al. ('05)] [E. ('06)] [Tropp et.al. ('06)] ... [Candes et. al. ('09)].

BP Stability for the Noisy Case

Stability

Given a signal $y = \mathbf{D}\underline{\alpha} + \underline{v}$ with a representation satisfying $\|\underline{\alpha}\|_{0}^{0} < 1/3\mu$ and a white Gaussian noise $\underline{v} \sim N(0, \sigma^2 \mathbf{I})$, BP will show* stability, i.e., $\|\hat{\underline{\alpha}}_{\mathsf{BP}} - \underline{\alpha}\|_{2}^{2} < \mathsf{Const}(\lambda) \cdot \mathsf{log} \, \mathsf{K} \cdot \|\underline{\alpha}\|_{0}^{0} \cdot \sigma^{2}$

Ben-Haim, Eldar & E. ('09)


* With very high probability

- \Box For σ =0 we ge
- Orthogonal Ma



To Summarize So Far ...

Image denoising
(and many other
problems in image
processing) requires
a model for the
desired image



We proposed a model for signals/images based on sparse and redundant representations



The Dictionary **D** should be found somehow !!!



We have seen that there are approximation methods to find the sparsest solution, and there are theoretical results that guarantee their success.

Part III Dictionary Learning: The K-SVD Algorithm

What Should **D** Be?

$$\hat{\underline{\alpha}} = \underset{\underline{\alpha}}{\text{argmin}} \|\underline{\alpha}\|_0^0 \quad \text{s.t.} \quad \frac{1}{2} \|\mathbf{D}\underline{\alpha} - \underline{y}\|_2^2 \le \epsilon^2 \qquad \qquad \hat{\underline{x}} = \mathbf{D}\hat{\underline{\alpha}}$$

Our Assumption: Good-behaved Images have a sparse representation




D should be chosen such that it sparsifies the representations


One approach to choose **D** is from a known set of transforms (Steerable wavelet, Curvelet, Contourlets, Bandlets, Shearlets ...)

The approach we will take for building **D** is training it, based on **Learning** from **Image Examples**


Measure of Quality for **D**

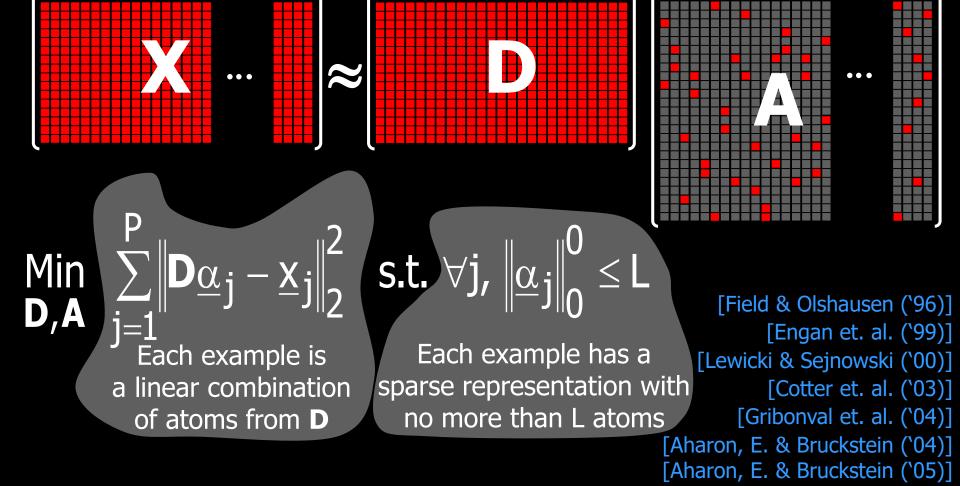

K-Means For Clustering

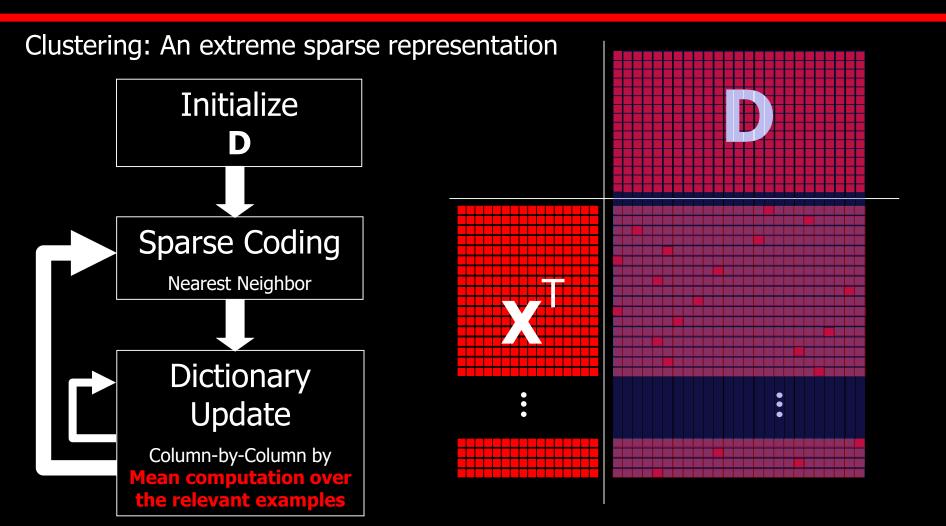

The K–SVD Algorithm – General

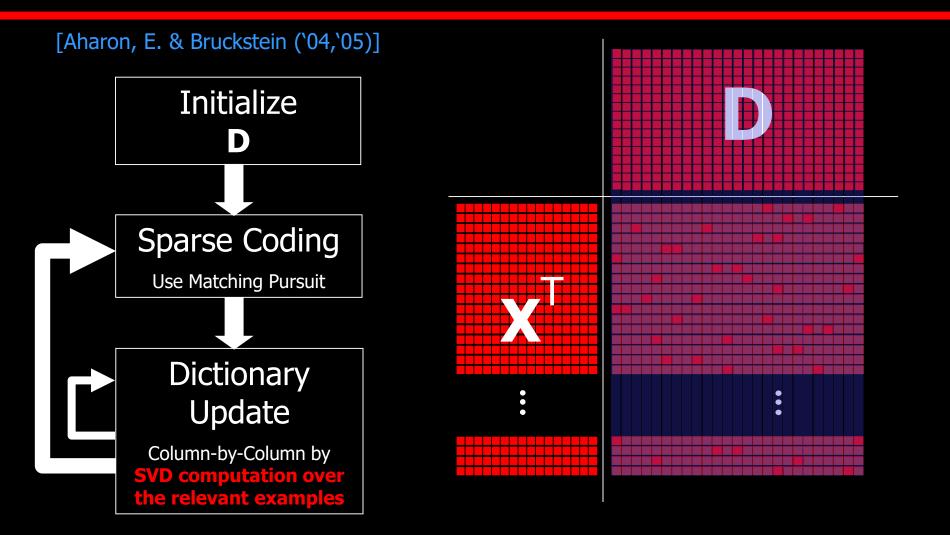


K-SVD: Sparse Coding Stage

$$\sum_{j=1}^{P} \left\| \mathbf{D}\underline{\alpha}_{j} - \underline{\mathbf{x}}_{j} \right\|_{2}^{2} \quad \text{s.t.} \quad \forall j, \ \left\|\underline{\alpha}_{j}\right\|_{p}^{p} \leq L$$


D is known! For the jth item we solve

$$\underset{\alpha}{\text{Min}} \ \left\| \mathbf{D}\underline{\alpha} - \underline{x}_j \right\|_2^2 \ \text{s.t.} \ \left\| \underline{\alpha} \right\|_p^p \leq L$$

Solved by A Pursuit Algorithm

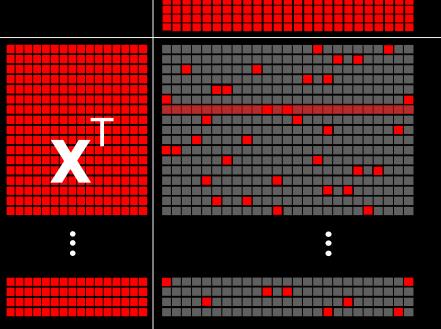

K-SVD: Dictionary Update Stage

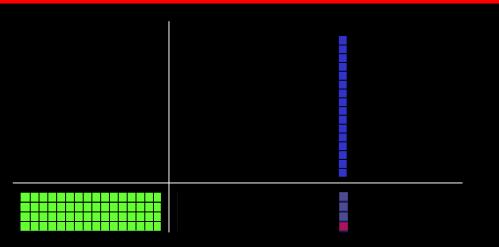

We refer only to the examples that use the column <u>d</u>_k



We should solve:



Fixing all $\bf A$ and $\bf D$ apart from the k^{th} column, and seek both \underline{d}_k and the k^{th} column in $\bf A$ to better fit the **residual!**

To Summarize So Far ...

Image denoising
(and many other
problems in image
processing) requires
a model for the
desired image



We proposed a model for signals/images based on sparse and redundant representations



Will it all work in applications?




We have seen approximation methods that find the sparsest solution, and theoretical results that guarantee their success. We also saw a way to learn **D**

Part IV Back to Denoising ... and Beyond — Combining it All

From Local to Global Treatment

☐ The K-SVD algorithm is reasonable for lowdimension signals (N in the range 10-400). As N grows, the complexity and the memory requirements of the K-SVD become prohibitive.

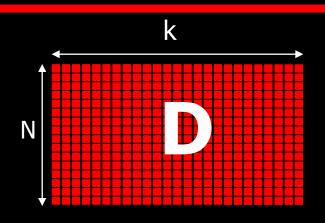

- ☐ So, how should large images be handled?
- ☐ The solution: Force shift-invariant sparsity—on each patch of size N-by-N (N=8) in the image, including overlaps.

$$\hat{\underline{x}} = \underset{\underline{x}, \{\underline{\alpha}_{ij}\}_{ij}}{\operatorname{ArgMin}} \ \frac{1}{2} \left\| \underline{x} - \underline{y} \right\|_{2}^{2} + \underbrace{\mu \sum_{ij} \left\| \underline{R}_{ij} \underline{x} - \underline{D}\underline{\alpha}_{ij} \right\|_{2}^{2}}_{s.t.} \ \underbrace{\left\| \underline{\alpha}_{ij} \right\|_{0}^{0} \leq L}_{our prior}$$

Extracts a patch in the ij location

What Data to Train On?

Option 1:

- Use a database of images,
- We tried that, and it works fine (~0.5-1dB below the state-of-the-art).

Option 2:

- ☐ Use the corrupted image itself!!
- □ Simply sweep through all patches of size N-by-N (overlapping blocks),
- ☐ Image of size 1000^2 pixels $\longrightarrow \sim 10^6$ examples to use more than enough.
- This works much better!





K-SVD Image Denoising

$$\hat{\underline{x}} = \underset{\underline{x}, \{\underline{\alpha}_{ij}\}_{ij}, \underline{D}?}{\text{ArgMin}} \frac{1}{\|\underline{x} - \underline{y}\|_{2}^{2}} + \mu \sum_{ij} \|\mathbf{R}_{ij}\underline{x} - \mathbf{D}\underline{\alpha}_{ij}\|_{2}^{2} \text{ s.t. } \|\underline{\alpha}_{ij}\|_{0}^{0} \leq L$$

 $\underline{\mathbf{x}} = \underline{\mathbf{y}}$ and \mathbf{D} known

 \underline{x} and α_{ii} known

D and α_{ij} known

Compute α_{ij} per patch

$$\underline{\alpha}_{ij} = \underset{\alpha}{\text{Min}} \| \mathbf{R}_{ij} \underline{\mathbf{x}} - \mathbf{D}\underline{\alpha} \|_2^2$$

s.t.
$$\|\underline{\alpha}\|_0^0 \leq L$$

using the matching pursuit

Compute **D** to minimize

$$\underset{\underline{\alpha}}{\text{Min}} \sum_{ij} \left\| \mathbf{R}_{ij} \underline{\mathbf{x}} - \mathbf{D} \underline{\alpha} \right\|_{2}^{2}$$

using SVD, updating one column at a time


K-SVD

Compute x by

$$\underline{\mathbf{X}} = \left[\mathbf{I} + \mu \sum_{ij} \mathbf{R}_{ij}^{\mathsf{T}} \mathbf{R}_{ij}\right]^{-1} \left[\underline{\mathbf{y}} + \mu \sum_{ij} \mathbf{R}_{ij}^{\mathsf{T}} \mathbf{D} \underline{\alpha}_{ij}\right]$$

which is a simple averaging of shifted patches

Image Denoising (Gray) [E. & Aharon ('06)]

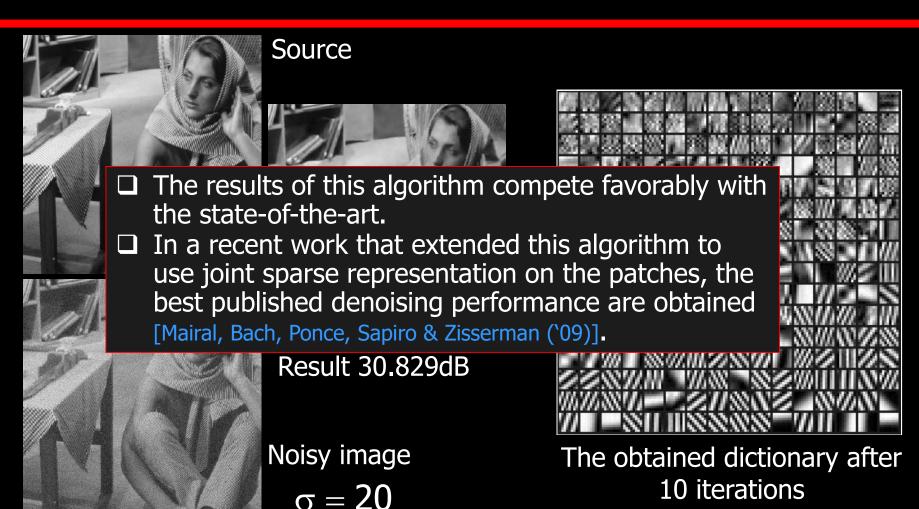

Denoising (Color) [Mairal, E. & Sapiro ('08)]

☐ When turning to handle color images, the



Denoising (Color) [Mairal, E. & Sapiro ('08)]

Our experiments lead to state-of-the-art denoising results, giving ~1dB better results compared to [Mcauley et. al. ('06)] which implements a learned MRF model (Field-of-Experts)



Original




Noisy (12.77dB)



Result (29.87dB)

Video Denoising [Protter & E. ('09)]

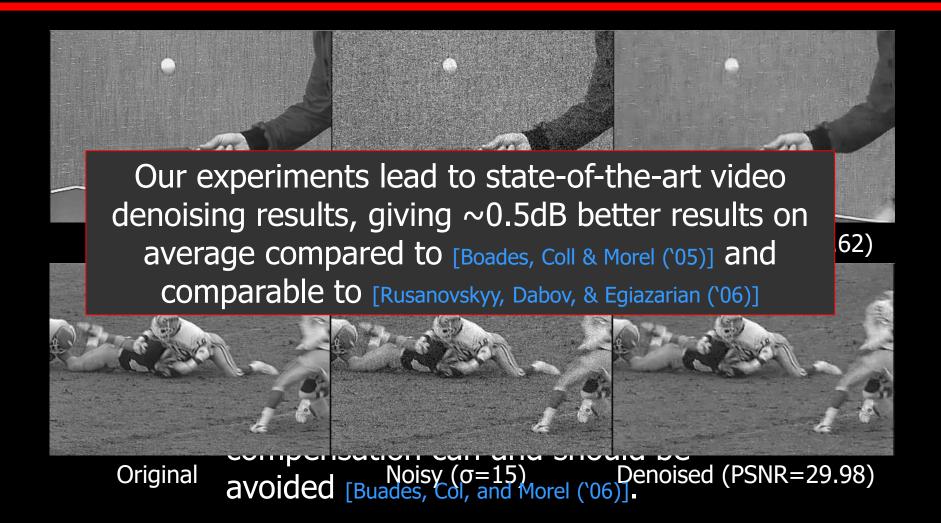

Low-Dosage Tomography [Shtok, Zibulevsky & E. ('10)]

- ☐ In Computer-Tomography (CT) reconstruction, an image is recovered from a set of its projections.
- ☐ In medicine, CT projections are obtained by X-ray, and it typically requires a high dosage of radiation in order to obtain a good quality reconstruction.
- ☐ A lower-dosage projection implies a stronger noise (Poisson distributed) in data to work with.
- ☐ Armed with sparse and redundant representation modeling, we can denoise the data and the final reconstruction ... enabling CT with lower dosage.

Image Inpainting – The Basics

- Assume: the signal \underline{x} has been created by $\underline{x} = D\underline{\alpha}_0$ with very sparse $\underline{\alpha}_0$.
- Missing values in <u>x</u> imply missing rows in this linear system.
- ☐ By removing these rows, we get


$$\tilde{\mathbf{D}}\underline{\alpha} = \tilde{\underline{\mathbf{x}}}$$

■ Now solve

$$\operatorname{Min}_{\alpha} \|\underline{\alpha}\|_{0} \quad \text{s.t.} \quad \underline{\tilde{\mathbf{x}}} = \mathbf{\tilde{D}}\underline{\alpha}$$

If $\underline{\alpha}_0$ was sparse enough, it will be the solution of the above problem! Thus, computing $D\underline{\alpha}_0$ recovers \underline{x} perfectly.



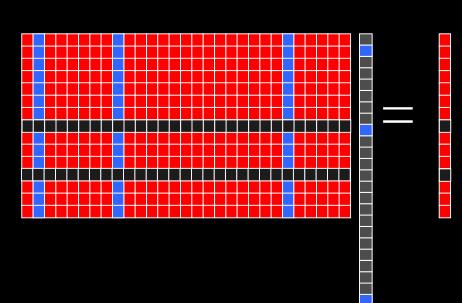

Side Note: Compressed-Sensing


- □ Compressed Sensing is leaning on the very same principal, leading to alternative sampling theorems.
- \square Assume: the signal \underline{x} has been created by $\underline{x} = D\underline{\alpha}_0$ with very sparse $\underline{\alpha}_0$.
- ☐ Multiply this set of equations by the matrix Q which reduces the number of rows.
- ☐ The new, smaller, system of equations is

$$\mathbf{Q}\mathbf{D}\underline{\alpha} = \mathbf{Q}\underline{\mathbf{x}} \longrightarrow \widetilde{\mathbf{D}}\underline{\alpha} = \widetilde{\mathbf{x}} \longrightarrow \mathbf{x}$$

- ☐ If $\underline{\alpha}_0$ was sparse enough, it will be the sparsest solution of the new system, thus, computing $\underline{\alpha}_0$ recovers \underline{x} perfectly.
- □ Compressed sensing focuses on conditions for this to happen, guaranteeing such recovery.





Inpainting [Mairal, E. & Sapiro ('08)]

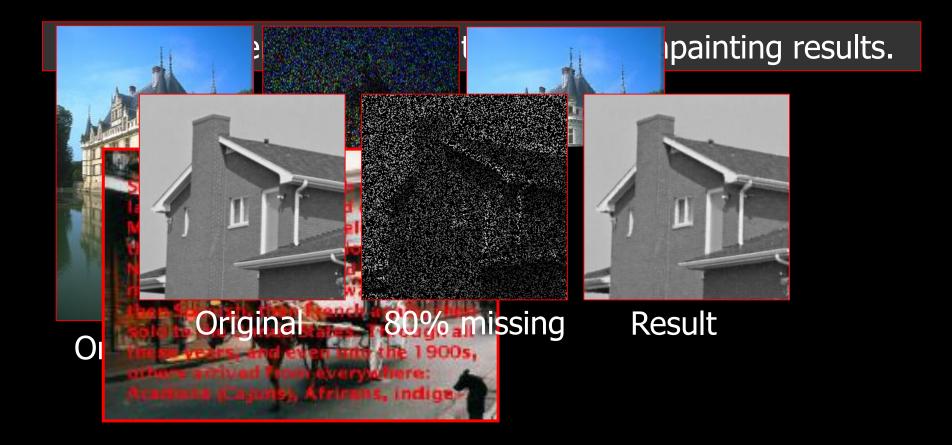


Inpainting [Mairal, E. & Sapiro ('08)]

The same can be done for video, very much like the denoising treatment: (i) 3D patches, (ii) no need to compute the dictionary from scratch for each frame, and (iii) no need for explicit motion estimation

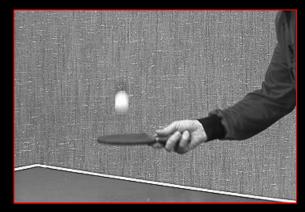

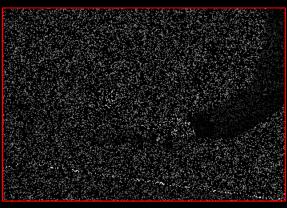

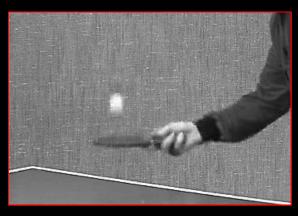

Original

80% missing

Result

Image Compression [Bryt and E. ('08)]

Original JPEG JPEG-2000 K-SVD

















Results for **820** Bytes per each file










Image Compression [Bryt and E. ('08)]

Original JPEG JPEG-2000 K-SVD

















Results for **550** Bytes per each file









Image Compression [Bryt and E. ('08)]

Original JPEG JPEG-2000 K-SVD















Results for **400** Bytes per each file









Deblocking the Results [Bryt and E. (`09)]

550 bytes K-SVD results with and without deblocking



K-SVD (6.60)



K-SVD (5.49)



K-SVD (6.45)



K-SVD (11.67)



Deblock (6.24)



Deblock (5.27)



Deblock (6.03)



Deblock (11.32)

Super-Resolution [Zeyde, Protter, & E. ('11)]



- ☐ Given a low-resolution image, we desire to enlarge it while producing a sharp looking result. This problem is referred to as "Single-Image Super-Resolution".
- ☐ Image scale-up using bicubic interpolation is far from being satisfactory for this task.
- □ Recently, a sparse and redundant representation technique was proposed [Yang, Wright, Huang, and Ma ('08)] for solving this problem, by training a coupleddictionaries for the low- and high res. images.
- We extended and improved their algorithms and results.

Super-Resolution – Results (1)

This book is about convex optimization, a special class of mathematical optimization problems, which includes least-squares and linear programming problems. It is well known that least-squares and linear programming problems have a fairly complete theory, arise in a variety of applications, and can be solved numerically very efficiently. The basic point of this book is that the same can be said for the larger class of convex optimization problems.

While the mathematics of convex optimization has been studied for about century, several related recent developments have stimulated new interest in the topic. The first is the recognition that interior-point methods, developed in the 1980s to solve linear programming problems, can be used to solve convex optimiza tion problems as well. These new methods allow us to solve certain new classes of convex optimization problems, such as semidefinite programs and second-order cone programs, almost as easily as linear programs.

The second development is the discovery that convex optimization problems (beyond least-squares and linear programs) are more prevalent in practice than was previously thought. Since 1990 many applications have been discovered in areas such as automatic control systems, estimation and signal processing, communications and networks, electronic circuit design, data analysis and modeling statistics, and finance. Convex optimization has also found wide application in com binatorial optimization and global optimization, where it is used to find bounds or the optimal value, as well as approximate solutions. We believe that many other applications of convex optimization are still waiting to be discovered.

There are great advantages to recognizing or formulating a problem as a convex optimization problem. The most basic advantage is that the problem can then be solved, very reliably and efficiently, using interior-point methods or other specia methods for convex optimization. These solution methods are reliable enough to be embedded in a computer-aided design or analysis tool, or even a real-time reactive or automatic control system. There are also theoretical or conceptual advantages of formulating a problem as a convex optimization problem. The associated dua

LOINK-TH'OORD begins

Ideal **Image**

An amazing variety of practical proble design, analysis, and operation) can be mization problem, or some variation such Indeed, mathematical optimization has be It is widely used in engineering, in elect trol systems, and optimal design probler and aerospace engineering. Optimization design and operation, finance, supply ch other areas. The list of applications is st

For most of these applications, mathe

a human decision maker, system designer The train

designer

modifies

stion ma

process, checks the results, and modifies when recessary. This human decision ma by the optimization problem, e.q., buyin viding portetio.

89 training h-pairs.

Given Image



desi

mia

Ind

It is

trol

and

desis

othe

a hu


peroc

wher

by t

port

Super-Resolution – Results (2)

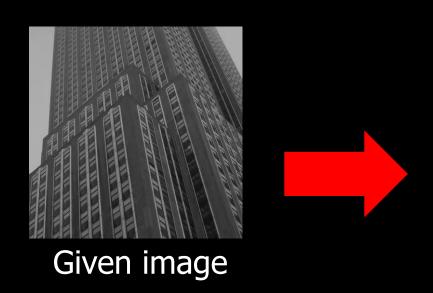




Scaled-Up (factor 2:1) using the proposed algorithm, PSNR=29.32dB (3.32dB improvement over bicubic)

Super-Resolution – Results (2)



The Original

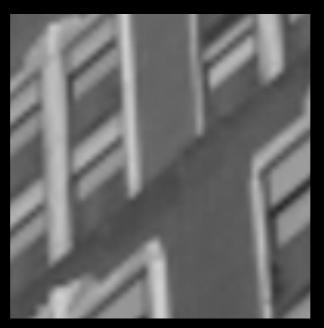


Bicubic Interpolation



SR result

Super-Resolution – Results (2)

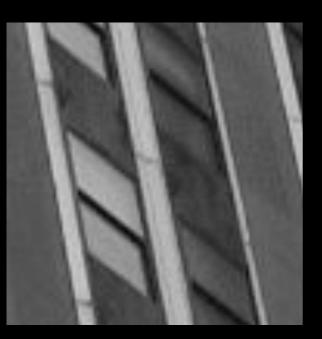






Bicubic Interpolation




SR result

To Summarize So Far ...

Image denoising
(and many other
problems in image
processing) requires
a model for the
desired image




We proposed a model for signals/images based on sparse and redundant representations

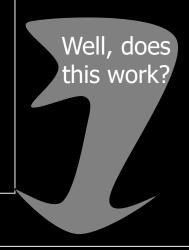

Well, many more things:

- Statistical models (BM)
- The analysis model and other improvements
- Other applications (medical, video, ...) ...




Yes! We have seen a group of applications where this model is showing very good results: denoising of bw/color stills/video, CT improvement, inpainting, super-resolution, and compression

Part V Summary and Conclusion

Today We Have Seen that ...

Sparsity, Redundancy, and the use of examples are important ideas that can be used in designing better tools in signal/image processing



In our work on we cover theoretical, numerical, and applicative issues related to this model and its use in practice.

We keep working on:
□ Improving the model
□ Improving the dictionaries
□ Demonstrating on other applications
□ ...



Thank You

All this Work is Made Possible Due to

my teachers and mentors





A.M. Bruckstein D.L. Donoho

colleagues & friends collaborating with me



G. Sapiro







and my students



















J.L. Starck I. Yavneh M. Zibulevsky



M. Aharon

O. Bryt

J. Mairal

M. Protter R. Rubinstein J. Shtok

R. Giryes Z. Ben-Haim J. Turek

R. Zeyde

If you are Interested.

More on this topic (including the slides, the papers, and Matlab toolboxes) can be found in my webpage:

http://www.cs.technion.ac.il/~elad

A book on these topics was published in August 2010.

